



ECOSHIELD
TO A BETTER FUTURE



SOLAR TUBULAR BATTERY

Registered Finnish Brand


ADVANTAGE :-

- Quick charge acceptance.
- Suitable for frequent power cuts.
- Batteries test by Bitrode life cycle tester.
- Heavy duty tubular battery design.
- Wide Range, Very low maintenance & long life.
- Specific gravity $1.240 \pm 0.5\%$.
- Internal resistance 5-6MΩ.
- Bulk Voltage 14.4V-15V @ 27°C.
- Float Voltage 13.4V-13.8V @ 27°C.
- Designed for long life 1250 + life cycle @ 80% DOD.
- Acid voltage per ampere hour is 40% more than other batteries.


**SILVER CALCIUM
INSIDE**

MADE IN INDIA BY ECOSHIELD


DISCHARGING CHARACTERISTICS

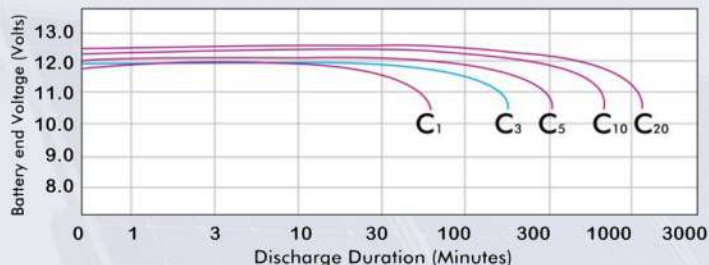


SELF DISCHARGING CHARACTERISTICS*

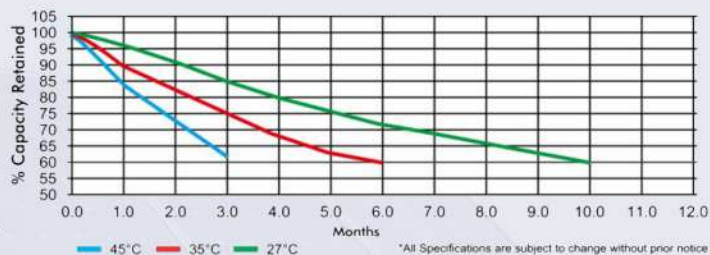

BATTERY LIFE (TUBULAR BATTERY)

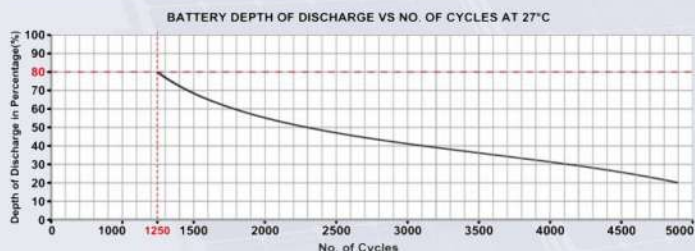

CHARGING CHARACTERISTICS*

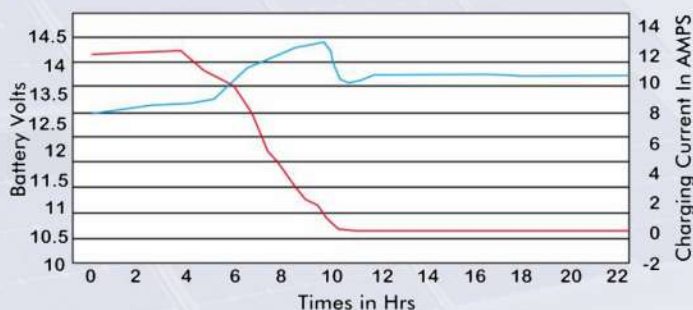

SILENT FEATURE

- Extra thick tubular plates with superfine grain structure, minimize grid corrosion at high temperature.
- Design as bigger electrolyte reserve volume ensure less topping up required during service life, once in a year.
- Batteries are designed to withstand frequent & long power cuts with quick recharge adaptability.
- Eco friend micro porous ceramic vent cum floating indicator to reduce topping up frequently & to ensure no acidic fumes.
- High efficiency grid design for enhanced performance.
- PE-DARAMIC envelope, separator ensuring long life.
- Low antimony lead alloy hence low self discharge.
- Compact Battery design, require less floor space.
- Deep cycle design.

BATTERY SPECIFICATION

Capacity	Dimension (mm)			Gross Weight Kg. (± 1.5%)
	Length(± 3mm)	Width(± 3mm)	Height(± 3mm)	
200AH-12V	505	190	410	66.00

*All Specifications are subject to change without prior notice